

Chem Master SGS600 Series

6.0 Purity Single Stage Stainless Steel Diaphragm Cylinder Regulator



The Chem Master SGS600 single stage diaphragm cylinder regulators are designed for primary pressure gas control of corrosive, toxic and high purity gases up to grade 6.0 purity (99.9999%), on applications where slight pressure variation from decreasing cylinder pressure is acceptable.

■ SGS600 Series | Single Stage Diaphragm Cylinder Regulator, FFKM Pressure Relief Valve



- Six port configuration
- Front and rear panel mounting capabilities
- Encapsulated seat design
- Low wetted surface area
- Full range of inlet and outlet fittings
- Side entry

MATERIAL

■ Body 316L Stainless Steel

■ Bonnet Nickel Plated Brass Barstock

■ Diaphragm 316L Stainless Steel

■ Bonnet Seal PTFE
■ Valve Seat PCTFE

■ Filter 10 Micron 316L Stainless Steel

* Subject to cylinder connection – ** Cylinder Connection not included *** NACE and 3.1 material certificates available on request, please contact the sales office for further information.

SPECIFICATION

■ Maximum Inlet Pressure 60 bar (870 PSI)

300 bar (4350 PSI) *

■ Delivery Pressure Range 1.5 bar (22 PSI)

3.5 bar (50 PSI)6 bar (90 PSI)10 bar (150 PSI)50mm (3") Diame


Gauges 50mm (2") DiameterPorts 1/4" NPT Female

■ Temperature Range -20° C to +60° C (-4° F to +140° F)


■ Flow Coefficient (Cv) 0.1

■ Helium Leak Integrity
 1 x 10-9 mbar l/s
 ■ Weight
 1.2 kg (2.7 lb) **

FLOW PERFORMANCE

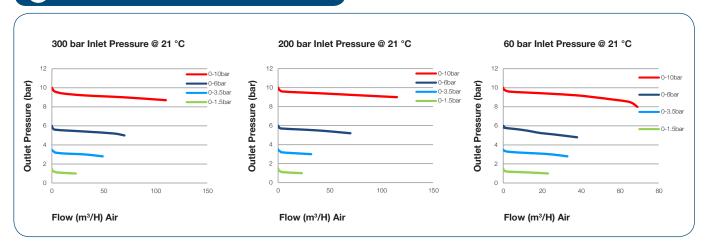

(I) DRAWINGS

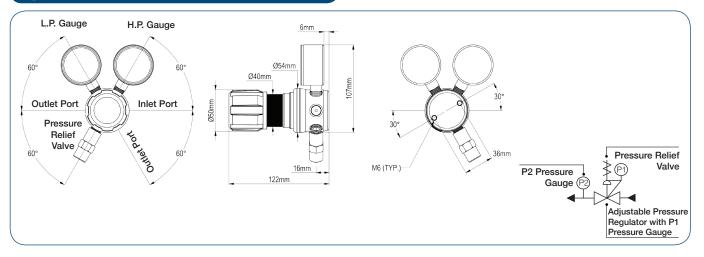

MODEL NO. SELECTOR GUIDE

Example for a Model No. for SGS600 Series

| SGS600- | 0- 02- | | 02- | | 00- | | 00- | | 001- | | 01- | | Α | | |
|-----------------|------------------------------------|---------------|----------------------------------|------------------|----------------------------|--------------------|-----------------------------|--------------------|------|---|-----|---|---|---------------------------------------|--|
| Product Type | Inlet Pressure Bar [Psig] | | Outlet Pressure Bar [Psig] | | Inlet Pressure Gauge | | Outlet Pressure Gauge | | | Inlet Connection | | Outlet Connection | | Options | |
| SGS600 | 02 | 60 [870] | 02 | 0 to 1.5 [22] | 00 | No Gauge Fitted | 00 | No Gauge Fitted | 000 | 1/4 NPT Female | 00 | 1/4 NPT Female | Α | No Options Selected | |
| | 04 | 300 [4350] | 03 | 0 to 3.5 [50] | 01 | bar/PSI | 01 | bar/PSI | 001 | 1/8 Stainless Steel Compression | 01 | 1/8 Stainless Steel Compression | В | Regulator Tee Purge FKM | |
| | | | 04 | 0 to 6 [90] | 10 | Plugged port | 10 | Plugged port | 002 | 1/4 Stainless Steel Compression | 02 | 1/4 Stainless Steel Compression | С | Regulator Tee Purge EPDM | |
| | | | | 0 to 10 [150] | | | | | 003 | 6mm Stainless Steel Compression | 03 | 6mm Stainless Steel Compression | D | Regulator Tee DeepPurge FKM | |
| | | | | | | | | | 004 | 1/4 NPT Male | 04 | 1/4 NPT Male | E | Regulator Tee DeepPurge EPDM | |
| | | | | | | | | | 010 | BS341 No.3 | 09 | Isolation Valve, 1/4 NPT Female, FKM Seal | F | Bonnet Vent Capture Kit | |
| | | | | | | | | | 012 | BS341 No.4 | 10 | Isolation Valve, 1/4 NPT Female, EPDM Seal | G | Helium Test Certificate | |
| | | | | | | | | | 019 | BS341 No.14 | 11 | Isolation Valve, 1/8 Stainless Steel Compression, FKM Seal | Н | 3.1 Material Certificate*** | |
| | | | | | | | | | 030 | DIN477 No.6 | 12 | Isolation Valve, 1/8 Stainless Steel Compression, EPDM Seal | J | NACE Certificate*** | |
| | | | | | | | | | 033 | DIN477 No.9 | 13 | Isolation Valve, 1/4 Stainless Steel Compression, FKM Seal | K | Certificate of Conformity (CoC) | |
| | | | | | | | | | 034 | DIN477 No.10 | 14 | Isolation Valve, 1/4 Stainless Steel Compression, EPDM Seal | L | Panel Mount Locking Nut Kit | |
| | | | | | | | | | 045 | CGA320 | 15 | Isolation Valve, 6 mm Stainless Steel Compression, FKM Seal | P | Calibration/Pressure Test certificate | |
| | | | | | | | | | 052 | CGA540 | 16 | Isolation Valve, 6mm Stainless Steel Compression, EPDM Seal | х | Special Instruction | |
| | | | | | | | | | 053 | CGA580 | 17 | Isolation Valve, 1/4 NPT Male, FKM Seal | | | |
| | | | | | | | | | conn | ur complete range of cylinder ections refer to 'Chem Master der Connections Data Sheet' | 18 | Isolation Valve, 1/4 NPT Male, EPDM Seal | | | |