

# SCH Series


## Gas Heater Sun·Clean Heater



### Specifications

	SCH-2	SCH-4	SCH-6	SCH-8	SCH-10	SCH-12	
Use Pressure	14.8MPa or less						
Standard flow	CO <sub>2</sub> Pressure 7.5MPa or less	12Nm <sup>3</sup> /h	19Nm <sup>3</sup> /h	39Nm <sup>3</sup> /h	54Nm <sup>3</sup> /h	70Nm <sup>3</sup> /h	80Nm <sup>3</sup> /h
	CO <sub>2</sub> Pressure 7.5MPa more than	2.5Nm <sup>3</sup> /h	4Nm <sup>3</sup> /h	8Nm <sup>3</sup> /h	11Nm <sup>3</sup> /h	14Nm <sup>3</sup> /h	16.5Nm <sup>3</sup> /h
	O <sub>2</sub> , N <sub>2</sub>	50Nm <sup>3</sup> /h	72Nm <sup>3</sup> /h	120Nm <sup>3</sup> /h	160Nm <sup>3</sup> /h	200Nm <sup>3</sup> /h	240Nm <sup>3</sup> /h
Inlet Connection	W22-14 O.R.						
Outlet Connection	W22-14 O.R.Male						
Heater Capacity	200W	400W	600W	800W	1000W	1200W	
Heater Voltage	100V						
Accessories	Gasket Packing(Fiber)×2Pcs.						
Approximate Weight	2.3kg					2.5kg	

### Outline drawing

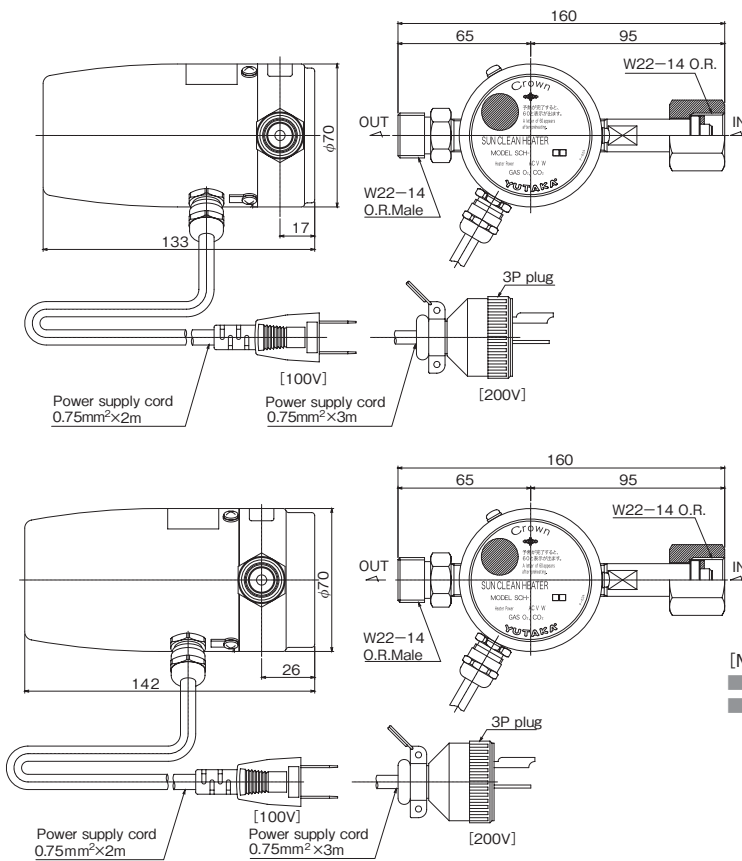

[Note]  
■ Unit : mm  
■ Dimintions are subject to change without notice.

### Materials of construction

Body	C3771BE
Bonnet	SPCC
Brass tube	C3604BD
Cylinder Connection	C3604BD
Cylinder nut	C3604BD