

# TANAKA


# Gas Warmer

For supplying the required amount of heat efficiently



## Standard Feature

- Inlet Connection : W22-14RH Nut
- Outlet Connection : W22-14RH Male
- Material : Brass (C3771B)
- Gas : CO<sub>2</sub>, N<sub>2</sub>, Ar
- Maximum Working Pressure : 15MPa
- Thermostat Set Temperature : 60~70°C
- Input Voltage : AC 200V
- CV Valve : 0.1
- Weight: 2.2kg

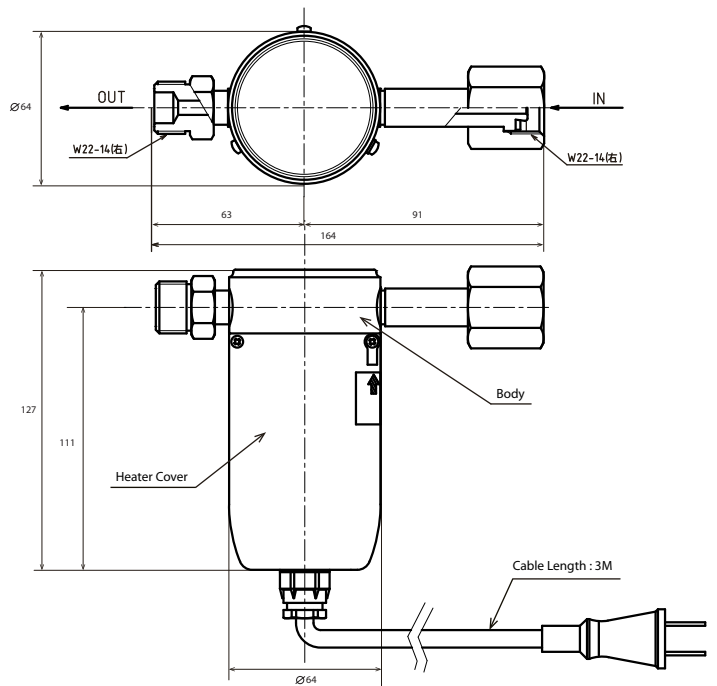

Model	Flowrate (m3/hr)			Heater		
	CO2(Less 7MPa)	CO2(7~10MPa)	N2, Air	Voltage	Capacity	Current
FLK300-H2T	10	3	40	200V	300W	1.5A
FLK490-H2T	16	5	60	200V	490W	2.45A
FLK600-H2T	20	7	80	200V	600W	3A

 日酸TANAKA株式会社